




Model: NGB - 35

Non-Ground Bearing Removable Gooseneck Trailer

Overall Length	Overall Width	Gooseneck Length	Deck Length	Deck Height	Tail Length	Tail Height	Ground Clearance
44' 6"	8' 6"	11' 6"	22'	25"	11'	40"	9"

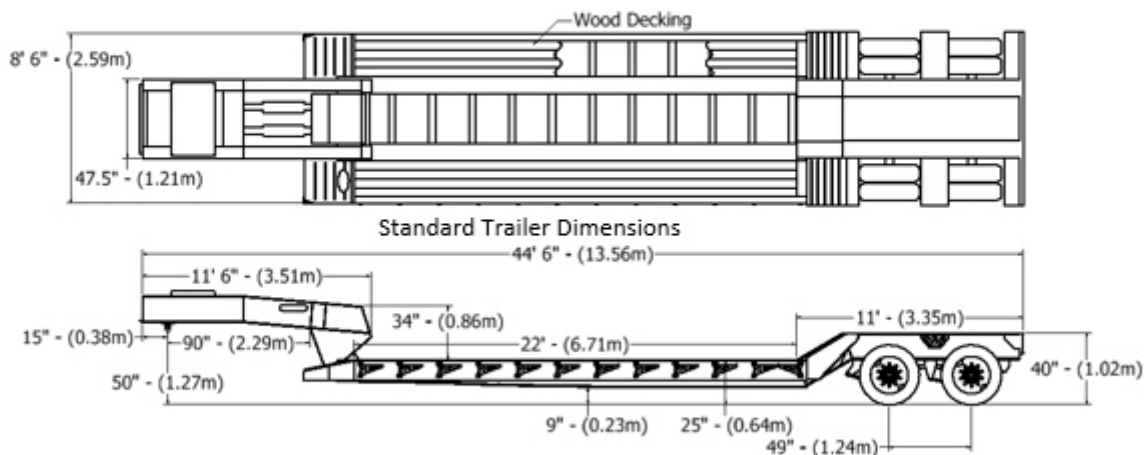

Weight 16,540 lbs. Capacity 70,000 lbs.

GVWR 86,540 lbs.

Gooseneck

King Pin Style	Fixed
King Pin Setting	15"
Swing Clearance	90"
5 th Wheel Height	50"
King Pin	2"
Ride Height Adj.	4 Position

Main Deck

Main Beam	W16x57 Beams A992 Grade 50
Centers	40" Standard
Side Beams	W12x22 A992 Grade 50
Crossmembers	W8x10 A992 Grade 50
Spacing	24" Standard
Outriggers	12" Cast Iron, 12 on Each Side
# of D-Rings	3 per Side
Front Ramps	Optional
Concentrated Load	70,000 lbs. (Within a 16' Span)

Tail Section

Riser	30°
-------	-----

Electrical

Lights	Sealed Modular Wire Harness
Connector	7 Way Connector

Hydraulics

Cylinder (2) 6" Bore w/ 22" Stroke
Control Valve: 2,500 psi
Engine 10 HP Electric Start – Pump: 1 GPM

Axle, Suspension, & Running Gear

# of Axles	2 Spring Suspension Axles
Axle Spacing	49"
Axle Capacity	25,000 lbs.
Brakes	16 ½" x 7" – 25,000 lbs.
ABS	2S / 1M

Decking / Flooring

Main Decking	2" Oak Lumber (Center Open)
--------------	-----------------------------

Wheel Assembly

Tires	255 / 70R 22.5
Rims	8.25 x 22.5 Steel Wheels

Finish

Anticorrosive Undercoat – 2 Coats Epoxy Primer
2 Coats Gloss Acrylic Enamel Top Coat
Mud Flaps & Reflective Tape

Popular Options

13 Horse Power Motor
Air Ride Suspension w/ Lift Axle
Aluminum Wheels
Apitong Wood Decking
Beavertail w/ Ramps
Bucketwell
Combo Wet Line Power System
Covered Wheels (Welded or Removable)
Flush Bed Hooks
T-1 100ksi (Main Frame)