




# Model: NGB - 52

Non-Ground Bearing Removable Gooseneck

Overall Length	Overall Width	Gooseneck Length	Deck Length	Deck Height	Tail Length	Tail Height	Ground Clearance
48' 6"	8' 6"	11' 6"	22'	25"	15'	40"	9"

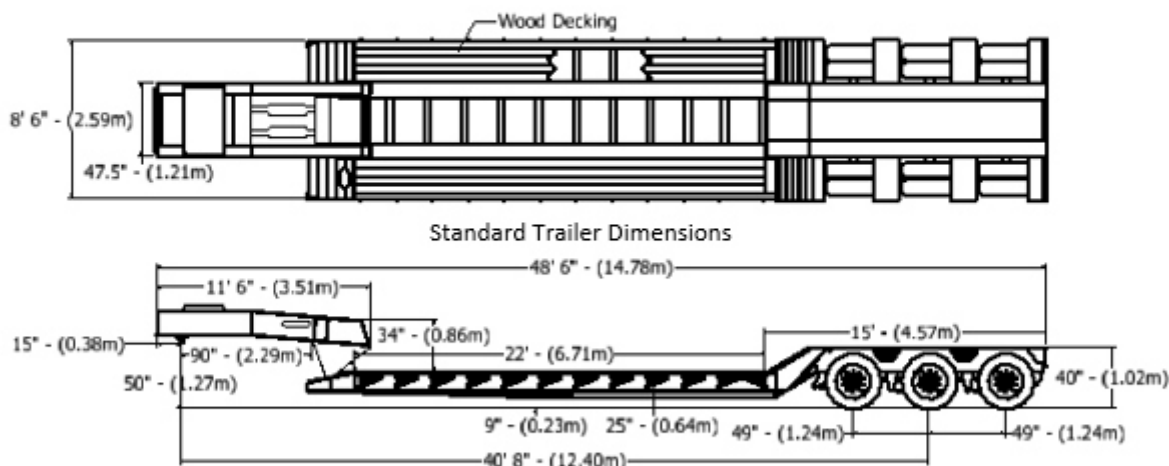

Weight 20,060 lbs. Capacity 104,000 lbs.

GVWR 124,060 lbs.

### Gooseneck

King Pin Style	Fixed
King Pin Setting	15"
Swing Clearance	90"
5 <sup>th</sup> Wheel Height	50"
King Pin	2"
Ride Height Adj.	4 Position

### Main Deck

Main Beam	W16x77 Beams A992 Grade 50
Centers	40" Standard
Side Beams	W12x22 A992 Grade 50
Crossmembers	W8x10 A992 Grade 50
Spacing	24" Standard
Outriggers	12" Cast Iron, 12 Each Side
# of D-Rings	3 per Side
Front Ramps	Optional
Concentrated Load	104,000 lbs. (Within a 16' Span)

### Tail Section

Riser 30°

### Electrical

Lights	Sealed Modular Wire Harness
Connector	7 Way Connector

### Hydraulics

Cylinder (2) 6" Bore w/ 22" Stroke
Control Valve: 2,500 psi

Engine 10 HP Electric Start - Pump: 1 GPM

### Axle, Suspension, & Running Gear

# of Axles	3 Spring Suspension Axles
Axle Spacing	49"
Axle Capacity	25,000 lbs.
Brakes	16 1/2" x 7" - 25,000 lbs.
ABS	Optional

### Decking / Flooring

Main Decking 2" Oak Lumber (Open Center)

### Wheel Assembly

Tires	255 / 70R x 22.5
Rims	8.25 x 22.5 Steel Wheels

### Finish

Anticorrosive Undercoat - 2 Coats Epoxy Primer
2 Coats Gloss Acrylic Enamel Top Coat
Mud Flaps & Reflective Tape

### Popular Options

13 Horse Power Motor
Air Ride Suspension w/ Lift Axle
Aluminum Wheels
Apitong Wood Decking
Beavertail w/ Ramps
Bucketwell
Combo Wet Line Power System
Covered Wheels (Welded or Removable)
Flush Bed Hooks
T-1 100ksi (Main Frame)