




Model: RG - 70

Ground Bearing Removable Gooseneck

Overall Length	Overall Width	Gooseneck Length	Deck Length	Deck Height	Tail Length	Tail Height	Ground Clearance
54' 8"	8' 6"	11' 6"	24'	25"	19' 2"	40"	9"

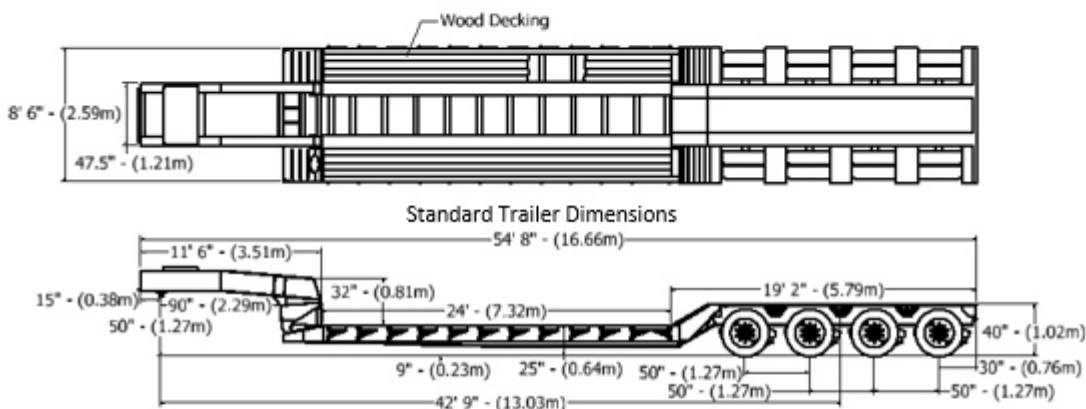

Weight	Capacity	140,000 lbs.
Gooseneck		
King Pin Style	Fixed	
King Pin Setting	15"	
Swing Clearance	90"	
5 th Wheel Height	50"	
King Pin	2"	
Ride Height Adj.	N/A	
Main Deck		
Main Beam	W16x100 Beams A992 Grade 50	
Centers	40" Standard	
Side Beams	W16x26 A992 Grade 50	
Crossmembers	W8x10 A992 Grade 50	
Spacing	24" Standard	
Outriggers	12" Cast Iron, 12 Each Side	
# of D-Rings	3 per Side	
Front Ramps	Optional	
Concentrated Load	140,000 lbs. (Within a 16' Span)	
Tail Section		
Riser	30°	
Electrical		
Lights	Sealed Modular Wire Harness	
Connector	7 Way Connector	
Hydraulics		
Cylinder (2)	8" Bore w/ 22" Stroke	
Control Valve	2,500 psi	
Engine:	13 HP Electrical Start – Pump: 1 GPM	

GVWR	
Axle, Suspension, & Running Gear	
# of Axles	4 Air Suspension Axles
Axle Spacing	50"
Axle Capacity	22,500 lbs.
Brakes	16 1/2" x 7" – 22,500 lbs.
ABS	Optional
Decking / Flooring	
Main Decking	2" Oak Lumber (Open Center)
Wheel Assembly	
Tires	11 R 22.5
Rims	8.25 x 22.5 Steel Wheels
Finish	
Anticorrosive Undercoat – 2 Coats Epoxy Primer	
2 Coats Gloss Acrylic Enamel Top Coat	
Mud Flaps & Reflective Tape	
Popular Options	
1 1/2" Mill Cambered	
Additional Deck Length up to 28'	
Aluminum Wheels	
Apitong Wood Decking	
Beavertail w/ Ramps	
Bucketwell	
Combo Wet Line & Power System	
Covered Wheels (Welded or Removable)	
Flush Bed Hooks	
T-1 100ksi (Main Frame)	

2700 S Tamiami Trail Suite 9, Sarasota FL. 34239
 www.sitrade.biz Tel USA +1 941 441 6751 - sales@sitrade.biz