



Overall Length	Overall Width	Gooseneck Length	Deck Length	Deck Height	Rear Length	Rear Height	Ground Clearance
48'	8' 6"	9'	32' 6"	41"	N/A	N/A	N/A

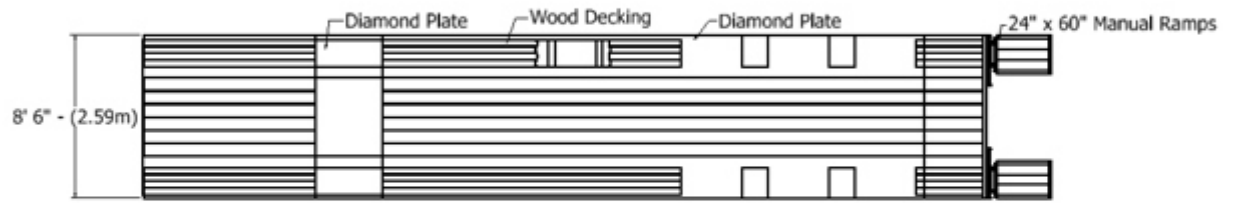

Standard Trailer Dimensions

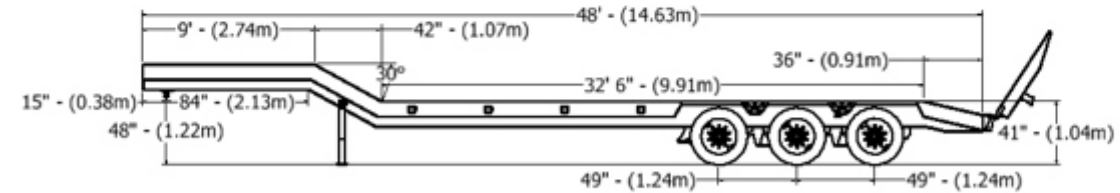

Weight	20,030 lbs.	Capacity	104,000 lbs.
Gooseneck			
King Pin Style	Fixed		
King Pin Setting	15"		
Swing Clearance	84"		
5 th Wheel Height	48"		
King Pin	2"		
Ride Height Adj.	N/A		

GVWR	124,030 lbs.
Axle, Suspension, & Running Gear	
# of Axles	3 Spring Suspension Axles
Axle Spacing	49"
Axle Capacity	25,000 lbs.
Brakes	16 1/2" x 7" – 25,000 lbs.
ABS	Optional

Main Deck	
Main Beam	W16x77 Beams A992 Grade 50
Centers	40" Standard
Side Beams	C10x15.3
Crossmembers	W8x10 A992 Grade 50
Spacing	24" Standard
Outriggers	N/A
# of D-Rings	4 per Side
Front Ramps	N/A
Concentrated Load	104,000 lbs. (Within a 16' Span)

Decking / Flooring	
Main Decking	2" Oak Lumber
Wheel Assembly	
Tires	255 / 70 R 22.5
Rims	8.25 x 22.5 Steel Wheels

Tail Section	
Beavertail	36"

Finish	
Anticorrosive Undercoat – 2 Coats Epoxy Primer	
2 Coats Gloss Acrylic Enamel Top Coat	
Mud Flaps & Reflective Tape	

Electrical	
Lights	Sealed Modular Wire Harness
Connector	7 Way Connector

Popular Options	
36" x 132" Electric Over Hydraulic Bi-Fold Ramps	
Additional Deck Length	
Additional D-Rings	
Air Ride Suspension w/ Lift Axle	
ISO Twist Locks	
Lockable Storage	
Manual Height Control	
Neck Fenders	
Rolling Tailboard	
Winch Kit	

Ramps	
24" x 60" Manual Ramps	