



# Model: RN - 60

Rigid Narrow Neck

Overall Length	Overall Width	Gooseneck Length	Deck Length	Deck Height	Rear Length	Rear Height	Ground Clearance
45' 9"	8' 6"	8' 11"	32' 6"	41"	N/A	N/A	N/A

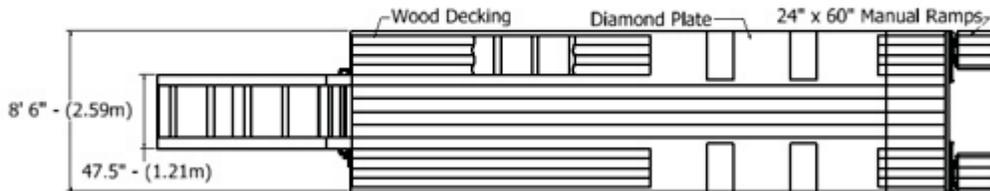

Standard Trailer Dimensions

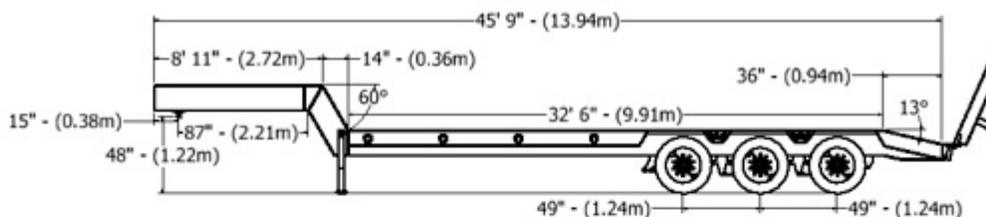

Weight Capacity 120,000 lbs.

GVWR

Gooseneck	
King Pin Style	Fixed
King Pin Setting	15"
Swing Clearance	87"
5 <sup>th</sup> Wheel Height	48"
King Pin	2"
Ride Height Adj.	N/A
Main Deck	
Main Beam	W16x77 Beams A992 Grade 50
Centers	40" Standard
Side Beams	C12x20.7
Crossmembers	W8x10 A992 Grade 50
Spacing	24" Standard
Outriggers	N/A
# of D-Rings	4 per Side
Front Ramps	N/A
Concentrated Load	120,000 lbs. (Within a 16' Span)
Tail Section	
Beavertail	36"
Electrical	
Lights	Sealed Modular Wire Harness
Connector	7 Way Connector
Ramps	
24" x 60" Manual Ramps	

Axle, Suspension, & Running Gear	
# of Axles	3 Spring Suspension
Axle Spacing	49"
Axle Capacity	25,000 lbs.
Brakes	16 1/2" x 7" – 25,000 lbs.
ABS	Optional
Decking / Flooring	
Main Decking	2" Oak Lumber
Wheel Assembly	
Tires	255 / 70 R 22.5
Rims	8.25 x 22.5 Steel Wheels
Finish	
Anticorrosive Undercoat – 2 Coats Epoxy Primer	
2 Coats Gloss Acrylic Enamel Top Coat	
Mud Flaps & Reflective Tape	
Popular Options	
36" x 132" Electric Over Hydraulic Bi-Fold Ramps	
Additional Deck Length	
Additional D-Rings	
Air Ride Suspension w/ Lift Axle	
ISO Twist Locks	
Lockable Storage	
Manual Height Control	
Neck Fenders	
Rolling Tailboard	
Winch Kit	

2700 S Tamiami Trail Suite 9, Sarasota FL. 34239  
 www.sitrade.biz Tel USA +1 941 441 6751 - sales@sitrade.biz