


Model: DD - 40

Drop Deck

Overall Length	Overall Width	Gooseneck Length	Deck Length	Deck Height	Rear Length	Rear Height	Ground Clearance
48'	8' 6"	11'	37'	40"	N/A	N/A	N/A

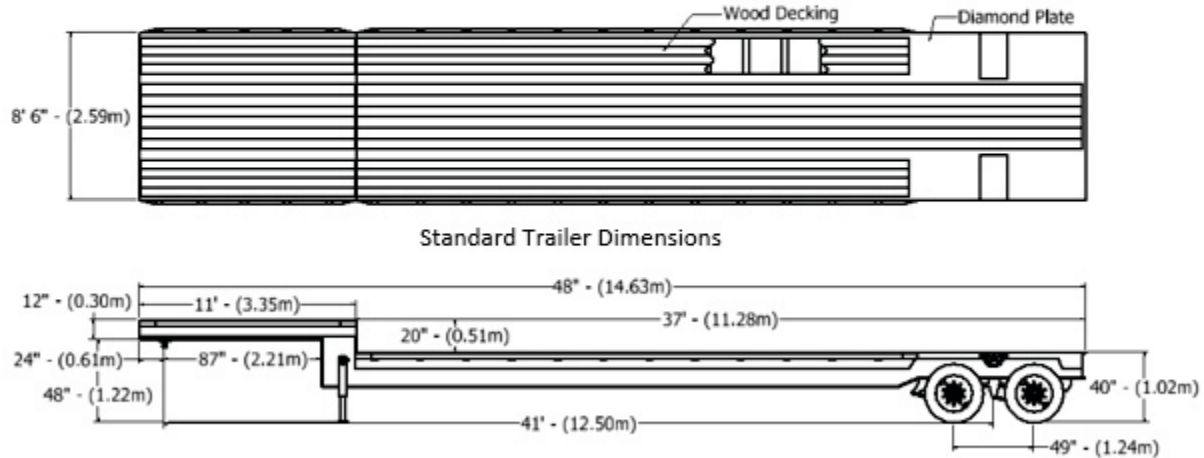

Standard Trailer Dimensions

Weight	Capacity	80,000 lbs.
Gooseneck		
King Pin Style	Fixed	
King Pin Setting	24"	
Swing Clearance	87"	
5 th Wheel Height	48"	
King Pin	2"	
Ride Height Adj.	N/A	
Main Deck		
Main Beam	W21x50 Beams A992 Grade 50	
Centers	40" Standard	
Side Beams	C10x15.3	
Crossmembers	W8x10 A992 Grade 50	
Spacing	24" Standard	
Outriggers	N/A	
# of D-Rings	N/A	
Front Ramps	N/A	
Concentrated Load	80,000 lbs. (Within a 16' Span)	
Tail Section		
Riser	N/A	
Electrical		
Lights	Sealed Modular Wire Harness	
Connector	7 Way Connector	
Hydraulics		
N/A		
N/A		
N/A		

GVWR	
Axle, Suspension, & Running Gear	
# of Axles	2 Spring Suspension Axles
Axle Spacing	49"
Axle Capacity	25,000 lbs.
Brakes	16 1/2" x 7" – 25,000 lbs.
ABS	2S / 1M
Decking / Flooring	
Main Decking	2" Oak Lumber
Wheel Assembly	
Tires	255 / 70R 22.5
Rims	8.25 x 22.5 Steel Wheels
Finish	
Anticorrosive Undercoat – 2 Coats Epoxy Primer	
2 Coats Gloss Acrylic Enamel Top Coat	
Mud Flaps & Reflective Tape	
Popular Options	
36" x 84" Electric Over Hydraulic Ramps	
36" Beavertail	
48" Headboard (Aluminum or Steel)	
Additional Deck Length	
Additional D-Rings	
Air Ride Suspension w/ Lift Axle	
Apitong Wood Decking	
ISO Twist Locks	
Rolling Tailboard	
Winch Kit	

2700 S Tamiami Trail Suite 9, Sarasota FL. 34239
 www.sitrade.biz Tel USA +1 941 441 6751 - sales@sitrade.biz